

Large Temporary Warehouse Tent , Outdoor Commercial Storage Tent

Our Product Introduction

Basic Information

- Place of Origin: Guangdong , China
- Brand Name: Tendars
- Certification: ISO9001, SGS, Coc, CE
- Model Number: Big tent
- Minimum Order Quantity: 25 square meters
- Price: Reconsideration
- Packaging Details: 1, The aluminium frame structure packed into the bubble film 2, the pvc fabric roof cover and sidewalls are packed into the PVC fabric carry bag; 3, Hardware packed into the box.
- Delivery Time: 18days or To be negotiated
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50000 Square Meters per Month




Product Specification

- Product Name: Outdoor Storage Canopy
- Frame Material: Hard Pressed Extruded Aluminum Alloy 6061/T6
- Roof Cover: 850g/sqm Double PVC-coated Polyester Fabric
- Fabric Color: Customized To Customer's Project
- Size: Customized To Customer's Project
- Wind Resistance: 100-120km/hour
- Connectors: Hot-dip Galvanized Steel Parts
- Usage: Wedding,exhibition,party,event,Outdoor Advertising
- Highlight: **Large Temporary Warehouse Tent, Commercial Temporary Warehouse Tent, Outdoor Commercial Storage Tent**



More Images





for more products please visit us on marquees-tent.com

Product Description

Large Commercial Industrial Temporary Warehouse Workshop Outdoor Storage Canopy

Product Parameter :

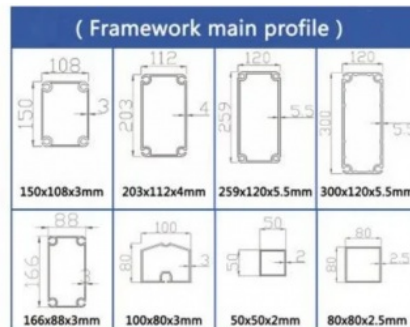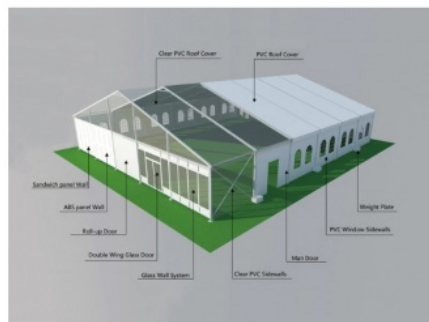

| | |
|------------------------|---|
| Main Structure | aluminium alloy,PVC fabric |
| Size | 8X10m,10X20m,18X30m,20X30m,30X40m,20x50m, 30x50m,50x100m |
| Material Features | Waterproof,Fireproof,Uv resistant |
| Cover material Density | 650g/sqm, 750g/sqm, 850g/sqm Both sides lacquered PVC coated fabric |
| Features | UV Resistant, Waterproof, Fire RetardantB1 |
| Sidewall | PVC Wall, Glass Wall, ABS Wall, Sandwich Wall |
| Wind Load | 80km/h - 120km/h |
| Snow Load | 10cm Thickness Floating Snow |
| Application | storage, stock, military, event, fair |
| Life Time | Aluminum frame more than 20 Years. PVC fabric 8 years |
| Certification | SGS,ISO 9001:2008,IAF.NAC |

Product description

The role of storage tent frame is to support the entire tent, so its selection of material can be said to be an important factor in determining the safety of storage tent, at present, no matter what type of mainstream tent is the use of aluminum alloy frame, which is more stable than the traditional steel and aluminum frame. The 6061-T6 aluminum alloy used in the storage tent has a higher comprehensive strength than the conventional aluminum alloy profiles, and the hardness can even reach 15HW(the higher the hardness, the better the wear resistance), so that the storage tent has the ability to resist 8-10 strong winds in the outdoors!

And the larger the size of the warehouse tent, the thicker the aluminum alloy profile used in the frame, so as to ensure that the tent is strong enough and stable, in addition to all the aluminum alloy profile surface will be specialized treatment, so that it will not affect the quality of the tent due to rust, coupled with the use of galvanized steel components to connect the entire tent

together. The safety and stability of the entire tent can be said to be comparable to that of a fixed building!

Application scenarios:

1. It can be widely used as the wedding tent, stadium tent, warehouse tent, party tent, exhibition tent, conference tent, different kinds of festivals tent, hajj tent, corporate events tent, sports tent, & temporary, semi-permanent or permanent building purpose etc.
2. Connections is Hot-dip galvanized steel.
3. Life span of fabric(cover & sidewalls) is 8-10years,aluminum frame is 20-30years.
4. Structure safety parameters: Wind load: 100km/h (0.5kn/M2), Snow load: 25kg/sq.m

Tent materials :



Frame Structure:

Hard pressed extruded aluminium alloy 6061/T6. European standard, much more harder than normal aluminum alloy. With anodized, the aluminum will not be oxidated and the color will be always new for long time. Lifespan: over 20 years.

The wind load capacity is based on the aluminium hardness.

Hardness achieved 15HW



Tent Fabric Cover:

Double PVC coated polyester, 850g/m2, block-out, water-proof, UV resistant, EUR fire retardant DIN4102 B1/M2/B1, snow resistance, tear resistance.

Temperature resistance(8C) : 408C-70

Fabric cover double PVC-coated polyester fabric



temperature resistance(°C) :-40°C-70°C. Lifespan: 8 years



Thickness

Premium grade,high gloss white, thickness 20.67mm



Strength

All covers are made of double-coater synthetic fiber with best performance in breaking strength



**Flame retardant to
DIN4102 B1, M2, CFM**



wind resistant



snow resistant



UV resistant



FAQ :

Q: Are you a factory or trade company?

We are factory and supply factory price to our agent and customers directly.

Q: Can you print our logos on event tent for sale?

Yes. Customized logos can be printed on the tent fabric.

Q: Is your tent strong and stable enough? How about the wind loading?

Yes. The main frameworks (upright support and roof beam) are manufactured with high impact extruded anodized aluminum (6061/T6), so our tent structure is safe and strong enough to resist wind up to 100 km/hr.



Guangzhou Tendars Tent Co., Limited

☎ 0086 13640286461

✉ amanda@marquees-tent.com

🌐 marquees-tent.com

No.319, 2nd building, 8th zone, Aoyuan city plaza, Zhongcun Street, Guangzhou, Guangdong, China