


Aluminum Party Marquee Tent Including Integrated Floor System for Gravel Venues

Our Product Introduction


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: CE, ISO 9001, EN 13782, DIN 4102 B1 fabric
- Model Number: TD-PMT-B2-11
- Minimum Order Quantity: 1 set
- Price: USD 25 - 95 per square meter
- Packaging Details: Frame in bundles by assembly order, fabric folded with interleaving, fittings in labelled crates
- Delivery Time: 15-25 working days after drawing confirmation
- Payment Terms: T/T 30% deposit, balance before shipment; L/C at sight
- Supply Ability: 12000 square meters per month

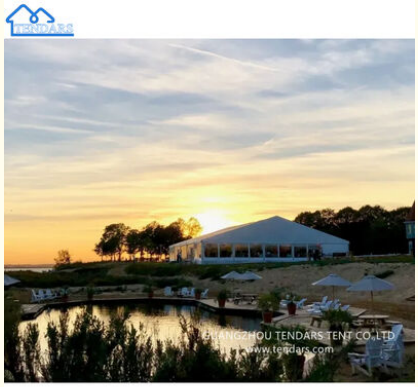

Product Specification

- Frame Material: Hard-pressed Extruded Aluminum 6061/T6
- Frame Profile: 64 / 82 / 100 / 120 Mm Series By Span
- Roof Fabric: 650-850 G/sqm Double PVC-coated Polyester
- Side Wall: PVC, Clear PVC, Glass Panel, Mesh, ABS Hard Wall
- Wind Load: Engineered Configuration With Written Operating Limits
- Snow Load: Steeper Pitch And Reduced Purlin Spacing Options
- Fire Retardant: DIN 4102 B1 / EN 13501 B-s1,d0 On Request
- Application: Gravel And Uneven Venues
- Warranty: 5 Years Frame, 2 Years Fabric
- Service: Shop Drawings, Supervisor Installation, Lifetime Spares
- Highlight: **Aluminum Party Marquee Tent**,

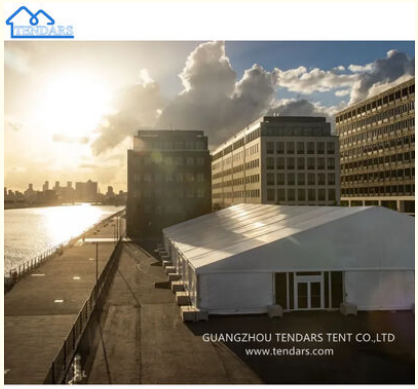

More Images



for more products please visit us on marquees-tent.com



Our Product Introduction

for more products please visit us on marquees-tent.com

Product Description

Gravel, packed earth and sloping stone are the three surfaces that ruin an otherwise well planned event. Chairs wobble, heels catch, wheelchairs cannot move, and a dropped glass disappears into the stones. An integrated floor system turns that surface into a level, stable platform inside the structure, so the interior behaves like a room regardless of what lies beneath it.

Floor systems are not simply a deck laid on the ground. The platform must be levelled against the actual terrain, edge panels must close the gap at doorways, and the structure's anchoring must not conflict with the floor framing. We design the floor and frame together, with a ramp or threshold detail at each entrance so guests do not step over a lip in the dark.

Key Features and Selling Points

- **Levelled platform:** Adjustable framing levels the interior against gravel, earth or sloping paving without excavation.
- **Safe thresholds:** Ramp and threshold details at each entrance remove the step that causes trips at evening events.
- **Load distributed decking:** Deck panels distribute furniture and crowd loads without punching into soft ground.
- **Accessible circulation:** A continuous level surface allows wheelchairs, trolleys and service equipment to move freely.
- **Separated from anchoring:** Floor framing and structure anchoring are coordinated so neither undermines the other.
- **Removable and reusable:** Floor sections pack with the tent and can be reused on the next site with different terrain.

Technical Specifications

Parameter	Specification
Platform	Adjustable levelling frame
Deck	Load distributed panels
Access	Ramp or threshold at each entrance
Reuse	Packs with structure, terrain independent
Frame material	Hard-pressed extruded aluminum alloy 6061/T6, anodized finish
Frame profile series	64 mm / 82 mm / 100 mm / 120 mm square profiles by span
Bay spacing	3 m / 4 m / 5 m modular bays, extendable at any time
Eave height options	2.5 m to 4 m clear height, higher on request
Roof fabric	650 g / 750 g / 850 g per sqm double PVC-coated polyester, blackout available
Side wall options	Solid PVC, clear PVC, glass panel, mesh, glass door, ABS hard wall
Fire performance	Fabric meeting DIN 4102 B1 / EN 13501 B-s1,d0 on request
Wind load guidance	Engineered configuration by site exposure, documented operating limits
Snow load guidance	Steeper pitch and reduced purlin spacing for snow regions
Temperature range	-30 C to +70 C service range for fabric and frame
Design life	15 years frame, 8 to 10 years fabric under normal use
Warranty	5 years on aluminum frame structure, 2 years on PVC fabric

All values are configuration dependent. Final specifications are confirmed on the approved drawing before production.

Clear Span, Transparent Roof or Solid Wall

The three common configurations are compared below. Most Croatian projects combine two of them on one frame, for example glass facing the sea and insulated solid walls facing the windward side.

Configuration	Exposure grade	Main advantage	Photography	Best suited to
Clear span with solid PVC walls	A	Full weather protection, lowest cost per sqm	Clean but featureless	Dinners, winter functions, storage
Clear span with clear or glass walls	A+	Protection with uninterrupted view	Excellent, low reflection	Seaside receptions, terraces, marina bars
Transparent roof with solid walls	A+	Sky visible, walls shelter wind	Strong at dusk, hot at midday	Evening ceremonies, sunset dinners
Open sided with shade roof	B	Maximum airflow, no rain protection	Bright and airy	Beach clubs, day bars, summer lounges

Buy or Hire: A Decision Table

Route	Typical user	Trade off
Buy	Recurring events, seasonal terraces, rental fleets	Own asset, no repeat fees, custom branding
Hire locally	One off events with no storage or crew	Low upfront cost, limited configuration choice
Buy with seasonal resale	Growing event businesses	Asset value retained, aluminum recyclable

Configuration Guide for Croatian Buyers

Use the table below to match the structure to your site exposure and event type. Our engineers confirm the final configuration against photographs of the ground, the prevailing wind direction and the event duration.

Duty level	Typical use	Recommended build
Light duty	Garden parties, short events, sheltered inland sites	64 mm profile, alternate bay bracing
Standard duty	Weddings, corporate functions, coastal towns in summer	82 mm profile, cross-braced bays, mixed walls
Heavy duty	Exposed coast, island venues, public events, winter use	100-120 mm profile, full bracing, engineered anchors

Applications

Outdoor venues with gravel courtyards, farmyards, archaeological sites and sloping gardens use floor systems for weddings, tasting events and corporate dinners. It also suits temporary retail and exhibition structures where a flat, clean surface is required for displays and where the ground cannot be permanently altered.

Floor Decisions That Save the Evening

The most common floor mistake is deciding after the tent is up. Floor framing needs to be installed before walls close the perimeter, and the threshold detail depends on the door positions, which depend on the layout. We ask for the table plan and the arrival route early, because those two inputs determine where ramps go and how much levelling is needed.

On gravel specifically, we recommend a membrane under the platform. It stops loose stones migrating into the framing, keeps the deck stable through the evening, and makes dismantling faster because nothing has worked its way into the joints. The cost is small and the effect on build time is noticeable.

Why Croatian Event Buyers Work With Tendars

Seventeen years of export work has taught us that the difference between a good marquee and a frustrating one is usually invisible in a photograph: a seam that holds, a clamp that does not slip, a panel that still fits in year six. We build for that timeline rather than for the first season, which is why rental companies and hotel groups return for additional structures instead of replacing what they already own.

Our client base covers rental fleets, hotels, wedding planners, marinas and municipal event departments, with deliveries into more than 60 countries and a growing presence in Croatia and neighbouring Adriatic markets. That spread matters practically, because it means a specification tested in coastal salt air, inland snow and festival dust has already met the conditions a new buyer is worried about.

Service continues after delivery. Spare panels, legs, beams, fittings and profile sections remain available for the life of the structure, and our team can review photographs of a damaged part and confirm within a day whether it can be repaired on site or must be replaced. For larger projects a supervisor can attend the first installation so the crew learns the sequence correctly from the start. For gravel and uneven venues, the drawing set we issue reflects that specific use rather than a generic template.

Notes for the Croatian Market

Croatian buyers tend to compare three things before price: whether the frame will survive a bora season, whether the fabric will still look white after a summer of sun, and whether spare parts can be delivered before the next event. Our proposals answer those questions in writing, with anchoring options by ground type, UV stabilised fabric specifications and a clear statement of what is held in stock.

Seasonality drives the calendar as well. Most installations happen between April and June, and most removals between October and November, which puts pressure on factory lead times in spring. Buyers who confirm drawings in winter typically secure their delivery slot before the spring rush, and we plan mixed container loading so several configurations can ship together without wasting volume.

Frequently Asked Questions

- **What lead time should we plan for a summer event?** Allow 15 to 25 working days for production after drawings are approved, plus shipping time to the port. For spring installations we recommend confirming drawings in winter, because factory slots fill quickly once the European event season begins.
- **Is installation included in the price?** The quotation states clearly what is included. For larger or exposed sites we can send a supervisor for the first installation, and we always provide the drawing set, the labelled packing list and the build sequence so a local crew can complete the work.
- **How do you handle damage discovered after delivery?** Send photographs of the part and its label, and our team confirms within one working day whether it can be repaired locally or replaced from stock. Because every panel and fitting is individually orderable, a single damaged piece never removes a whole structure from service.

Packaging and Quality Assurance

Frames are packed in bundles by assembly order, fabric panels are folded with protective interleaving, and small fittings travel in labelled crates that match the packing list. Loading is planned for mixed containers so that several configurations can ship together without wasting volume. Each shipment includes shop drawings, a packing list, an installation sequence and a maintenance sheet covering cleaning, storage and small repairs.

Before dispatch we trial assemble the frame, check every welded panel for leaks, and photograph the packed goods. If anything arrives damaged in transit, replacement parts are shipped from stock rather than waiting for a new production run. Shipments for gravel and uneven venues are labelled accordingly, so the receiving crew can match crates to the drawing on arrival.

Request a Quotation

Send us your site location, expected guest numbers, event dates and ground surface, and we will return a configuration proposal with anchoring options, installation guidance and a delivered price to your Croatian port or site. Samples of fabric and frame profiles can be couriered on request.

Email: amanda@marquees-tent.com | WhatsApp: +86-13640286461 | Web: http://www.marquees-tent.com

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China