Water Repellent Aluminum Party Marquee Tent Selected for Autumn Wedding Season

Our Product Introduction


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: CE, ISO 9001, EN 13782, DIN 4102 B1 fabric
- Model Number: TD-PMT-B2-18
- Minimum Order Quantity: 1 set
- Price: USD 25 - 95 per square meter
- Packaging Details: Frame in bundles by assembly order, fabric folded with interleaving, fittings in labelled crates
- Delivery Time: 15-25 working days after drawing confirmation
- Payment Terms: T/T 30% deposit, balance before shipment; L/C at sight
- Supply Ability: 12000 square meters per month



Product Specification

- Frame Material: Hard-pressed Extruded Aluminum 6061/T6
- Frame Profile: 64 / 82 / 100 / 120 Mm Series By Span
- Roof Fabric: 650-850 G/sqm Double PVC-coated Polyester
- Side Wall: PVC, Clear PVC, Glass Panel, Mesh, ABS Hard Wall
- Wind Load: Engineered Configuration With Written Operating Limits
- Snow Load: Steeper Pitch And Reduced Purlin Spacing Options
- Fire Retardant: DIN 4102 B1 / EN 13501 B-s1,d0 On Request
- Application: Autumn Wedding Season
- Warranty: 5 Years Frame, 2 Years Fabric
- Service: Shop Drawings, Supervisor Installation, Lifetime Spares
- Highlight: **Water Repellent Aluminum Marquee Tent**,

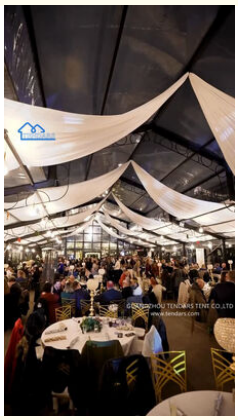

More Images



for more products please visit us on marquees-tent.com



Our Product Introduction

Product Description

September and October are the best months for a Croatian wedding and the wettest. The light is soft, the crowds are gone, and a slow front can settle over the coast for two days. Couples who book autumn need a structure that treats rain as normal weather rather than as an emergency, which means welded seams, sealed wall junctions and gutters that carry water away from where guests walk.

Water management is a system. Roof panels shed to gutters, gutters discharge at the corners, downpipes carry water clear of the base, and the ground around the structure is planned so that runoff does not pool at the entrance. Each of those details is small; together they decide whether the floor stays dry through a two day event.

Key Features and Selling Points

- **Welded roof seams:** High frequency welded panels with overlap direction set to shed water away from junctions.
- **Sealed wall junctions:** Wall to roof and wall to ground details close the gaps where wind driven rain enters.
- **Gutter and downpipe system:** Internal gutters discharge at the corners, away from entrances and dance floor areas.
- **Weighted ground skirt:** A skirt at the base blocks splash back from wet paving and soaked grass.
- **Mud management detail:** Threshold and matting guidance for entrances that will be walked through all evening.
- **Fast drying fabric:** Coated surfaces dry quickly after rain, so the structure can be struck without waiting a day.

Technical Specifications

Parameter	Specification
Roof	Welded seams, directional overlap
Water system	Internal gutter with corner downpipes
Base	Weighted skirt, splash control
Entrance	Threshold and matting detail
Frame material	Hard-pressed extruded aluminum alloy 6061/T6, anodized finish
Frame profile series	64 mm / 82 mm / 100 mm / 120 mm square profiles by span
Bay spacing	3 m / 4 m / 5 m modular bays, extendable at any time
Eave height options	2.5 m to 4 m clear height, higher on request
Roof fabric	650 g / 750 g / 850 g per sqm double PVC-coated polyester, blackout available
Side wall options	Solid PVC, clear PVC, glass panel, mesh, glass door, ABS hard wall
Fire performance	Fabric meeting DIN 4102 B1 / EN 13501 B-s1,d0 on request
Wind load guidance	Engineered configuration by site exposure, documented operating limits
Snow load guidance	Steeper pitch and reduced purlin spacing for snow regions
Temperature range	-30 C to +70 C service range for fabric and frame
Design life	15 years frame, 8 to 10 years fabric under normal use
Warranty	5 years on aluminum frame structure, 2 years on PVC fabric

All values are configuration dependent. Final specifications are confirmed on the approved drawing before production.

Clear Span, Transparent Roof or Solid Wall

The three common configurations are compared below. Most Croatian projects combine two of them on one frame, for example glass facing the sea and insulated solid walls facing the windward side.

for more products please visit us on marquees-tent.com

Configuration	Exposure grade	Main advantage	Photography	Best suited to
Clear span with solid PVC walls	A	Full weather protection, lowest cost per sqm	Clean but featureless	Dinners, winter functions, storage
Clear span with clear or glass walls	A+	Protection with uninterrupted view	Excellent, low reflection	Seaside receptions, terraces, marina bars
Transparent roof with solid walls	A+	Sky visible, walls shelter wind	Strong at dusk, hot at midday	Evening ceremonies, sunset dinners
Open sided with shade roof	B	Maximum airflow, no rain protection	Bright and airy	Beach clubs, day bars, summer lounges

Buy or Hire: A Decision Table

Route	Typical user	Trade off
Buy	Recurring events, seasonal terraces, rental fleets	Own asset, no repeat fees, custom branding
Hire locally	One off events with no storage or crew	Low upfront cost, limited configuration choice
Buy with seasonal resale	Growing event businesses	Asset value retained, aluminum recyclable

Configuration Guide for Croatian Buyers

Use the table below to match the structure to your site exposure and event type. Our engineers confirm the final configuration against photographs of the ground, the prevailing wind direction and the event duration.

Duty level	Typical use	Recommended build
Light duty	Garden parties, short events, sheltered inland sites	64 mm profile, alternate bay bracing
Standard duty	Weddings, corporate functions, coastal towns in summer	82 mm profile, cross-braced bays, mixed walls
Heavy duty	Exposed coast, island venues, public events, winter use	100-120 mm profile, full bracing, engineered anchors

Applications

Autumn weddings, harvest celebrations, October corporate events and shoulder season hotel functions use water repellent specifications. It also suits spring events in continental Croatia, where April showers arrive without warning, and any outdoor ceremony where the schedule cannot shift if the weather turns.

Wet Weather Planning for a Two Day Event

The most useful preparation is a decision made in advance: at what forecast does the ceremony move inside, and who makes that call. Organisers who agree a threshold before the wedding week avoid the stressful discussion on the morning itself. The structure supports either plan, because the ceremony and the dinner can share the same footprint when the weather closes in.

Ground conditions deserve attention in autumn. Grass that was firm in July becomes soft after a week of rain, so we recommend switching from stakes to ballast or ground screws and adding temporary trackway along the guest route. It costs a fraction of the event budget and prevents the photographs of guests carrying their shoes.

Why Croatian Event Buyers Work With Tendars

We have manufactured aluminum marquee structures for more than 17 years, supplying event rental companies, hotels, wedding planners and municipal event teams in over 60 countries, with a growing number of projects along the Croatian coast and inland. Our factory runs in-house aluminum cutting, CNC machining, welding and PVC welding lines, which means the frame and the fabric are made to match each other rather than assembled from third-party parts.

Practical experience shapes the specification. Croatian coastal clients deal with salt air, the bora and short installation windows, while inland clients deal with snow, frost and heated interiors. Having delivered structures into both conditions, we can tell a buyer which details matter for their site instead of selling the same tent to everyone. Every order is supported by shop drawings, a labelled packing list, a written installation sequence and a documented operating limit for wind and snow.

Quality control is documented rather than promised: incoming aluminum is checked for alloy and wall thickness, welded panels are water tested, and finished frames are trial assembled before packing. Structures are produced to CE marking requirements and can be supplied with fabric certification to DIN 4102 B1 or EN 13501 B-s1,d0, together with test reports for buyers who need them for permits or public tenders. For autumn

wedding season, the drawing set we issue reflects that specific use rather than a generic template.

Notes for the Croatian Market

The Adriatic market rewards structures that can change with the season: open and shaded in July, closed and heated in December, and quick to reconfigure when a venue changes its terrace layout. Our Croatian clients increasingly order one frame with two skins rather than two separate tents, which reduces storage, transport and depreciation at the same time.

Ordering from China is a logistics exercise as much as a purchasing decision. We quote delivered terms to Rijeka, Split, Ploce and Kopar, provide packing lists that match crate labels for customs inspection, and sequence loading so that the frame and roof required to close the structure always travel in the first container. Buyers who need documentation for EU import receive the commercial invoice, packing list and certification pack prepared before shipment.

Frequently Asked Questions

- **What ground surfaces can the tent be installed on?** Grass and soil take ground stakes, paved terraces take chemical anchors where drilling is permitted, and historic or protected paving takes ballast frames. We confirm the fixing method from photographs before the order, so the crew arrives with the right hardware.
- **How is the fabric maintained during the season?** Panels are cleaned with water and a mild detergent, checked for abrasion at contact points, and stored dry and loosely folded between events. A small repair kit with offcuts and a heat gun resolves most minor damage on site within minutes.
- **Do you supply spares for structures bought years ago?** Yes. Bay dimensions and profile colours are held constant across the range, so panels and fittings from earlier production batches remain compatible. We keep drawings on file to confirm the exact specification before shipping spares.

Packaging and Quality Assurance

Packing follows the build sequence rather than the shape of the components: the frame and roof bundle that closes the structure against weather is loaded last so it can be unloaded first. Fabric panels travel folded with interleaving to prevent abrasion in transit, and fittings are boxed by assembly stage so nothing has to be sorted on site.

Each crate is weighed, labelled and photographed before loading, and the photographs are sent with the shipping documents. That record settles most transit questions quickly and tells the receiving crew exactly what should be on the pallet before they sign for it. Shipments for autumn wedding season are labelled accordingly, so the receiving crew can match crates to the drawing on arrival.

Request a Quotation

Send us your site location, expected guest numbers, event dates and ground surface, and we will return a configuration proposal with anchoring options, installation guidance and a delivered price to your Croatian port or site. Samples of fabric and frame profiles can be couriered on request.

Email: amanda@marquees-tent.com | WhatsApp: +86-13640286461 | Web: http://www.marquees-tent.com

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China