


Riverside Aluminum Party Marquee Tent Suited to Continental Croatia Summer Festivals

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: CE, ISO 9001, EN 13782, DIN 4102 B1 fabric
- Model Number: TD-PMT-B3-01
- Minimum Order Quantity: 1 set
- Price: USD 25 - 95 per square meter
- Packaging Details: Frame in bundles by assembly order, fabric folded with interleaving, fittings in labelled crates
- Delivery Time: 15-25 working days after drawing confirmation
- Payment Terms: T/T 30% deposit, balance before shipment; L/C at sight
- Supply Ability: 12000 square meters per month

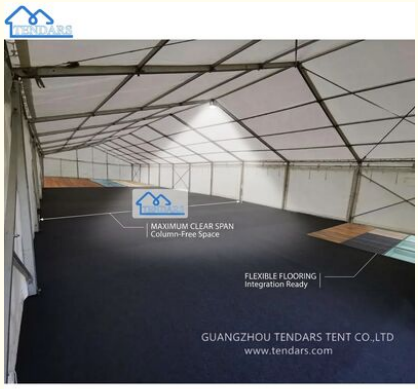

Product Specification

- Frame Material: Hard-pressed Extruded Aluminum 6061/T6
- Frame Profile: 64 / 82 / 100 / 120 Mm Series By Span
- Roof Fabric: 650-850 G/sqm Double PVC-coated Polyester
- Side Wall: PVC, Clear PVC, Glass Panel, Mesh, ABS Hard Wall
- Wind Load: Engineered Configuration With Written Operating Limits
- Snow Load: Steeper Pitch And Reduced Purlin Spacing Options
- Fire Retardant: DIN 4102 B1 / EN 13501 B-s1,d0 On Request
- Application: Riverside Summer Festivals
- Warranty: 5 Years Frame, 2 Years Fabric
- Service: Shop Drawings, Supervisor Installation, Lifetime Spares
- Highlight: **Aluminum Party Marquee Tent**,



More Images



for more products please visit us on marquees-tent.com



Our Product Introduction

for more products please visit us on marquees-tent.com

Product Description

River festivals in inland Croatia have a seasonal rhythm that shapes the tent specification. Water levels rise after spring rain, banks become soft, and the site that was firm in June may be a mud path after a July storm. A riverside marquee has to sit high enough, anchor without depending on deep stakes in saturated soil, and be buildable by a crew that cannot bring heavy machinery onto a flood plain.

We plan riverside installations around three questions: where the water went last time it rained hard, which direction the site drains, and how the crew will reach the build area without a vehicle. The answer usually combines ballast or ground screws with a slightly raised deck, and a packing plan that fits a hand carried delivery.

Key Features and Selling Points

- **Flood aware siting:** Layout guidance based on local water levels and drainage direction rather than a flat site plan.
- **Ballast and ground screw options:** Anchoring that works in soft banks where long stakes would pull out under load.
- **Raised deck option:** A platform keeps seating above damp ground and gives a stable surface after rain.
- **Hand carry delivery:** Components sized for narrow riverside paths and footbridges where vehicles cannot pass.
- **Quick seasonal build:** Colour coded sections allow a small crew to put up a festival hall in a working day.
- **Mud management detail:** Threshold and matting guidance for entrances that will be walked through all evening.

Technical Specifications

Parameter	Specification
Anchoring	Ballast, ground screw, or stake by soil type
Deck	Optional raised platform
Access	Hand carry bundles for riverside paths
Build	One working day with a small crew
Frame material	Hard-pressed extruded aluminum alloy 6061/T6, anodized finish
Frame profile series	64 mm / 82 mm / 100 mm / 120 mm square profiles by span
Bay spacing	3 m / 4 m / 5 m modular bays, extendable at any time
Eave height options	2.5 m to 4 m clear height, higher on request
Roof fabric	650 g / 750 g / 850 g per sqm double PVC-coated polyester, blackout available
Side wall options	Solid PVC, clear PVC, glass panel, mesh, glass door, ABS hard wall
Fire performance	Fabric meeting DIN 4102 B1 / EN 13501 B-s1,d0 on request
Wind load guidance	Engineered configuration by site exposure, documented operating limits
Snow load guidance	Steeper pitch and reduced purlin spacing for snow regions
Temperature range	-30 C to +70 C service range for fabric and frame
Design life	15 years frame, 8 to 10 years fabric under normal use
Warranty	5 years on aluminum frame structure, 2 years on PVC fabric

All values are configuration dependent. Final specifications are confirmed on the approved drawing before production.

Clear Span, Transparent Roof or Solid Wall

The three common configurations are compared below. Most Croatian projects combine two of them on one frame, for example glass facing the sea and insulated solid walls facing the windward side.

Configuration	Exposure grade	Main advantage	Photography	Best suited to
Clear span with solid PVC walls	A	Full weather protection, lowest cost per sqm	Clean but featureless	Dinners, winter functions, storage
Clear span with clear or glass walls	A+	Protection with uninterrupted view	Excellent, low reflection	Seaside receptions, terraces, marina bars
Transparent roof with solid walls	A+	Sky visible, walls shelter wind	Strong at dusk, hot at midday	Evening ceremonies, sunset dinners
Open sided with shade roof	B	Maximum airflow, no rain protection	Bright and airy	Beach clubs, day bars, summer lounges

Buy or Hire: A Decision Table

Route	Typical user	Trade off
Buy	Recurring events, seasonal terraces, rental fleets	Own asset, no repeat fees, custom branding
Hire locally	One off events with no storage or crew	Low upfront cost, limited configuration choice
Buy with seasonal resale	Growing event businesses	Asset value retained, aluminum recyclable

Configuration Guide for Croatian Buyers

Use the table below to match the structure to your site exposure and event type. Our engineers confirm the final configuration against photographs of the ground, the prevailing wind direction and the event duration.

Duty level	Typical use	Recommended build
Light duty	Garden parties, short events, sheltered inland sites	64 mm profile, alternate bay bracing
Standard duty	Weddings, corporate functions, coastal towns in summer	82 mm profile, cross-braced bays, mixed walls
Heavy duty	Exposed coast, island venues, public events, winter use	100-120 mm profile, full bracing, engineered anchors

Applications

River festivals, waterfront food events, music weekends on flood plains and municipal summer programmes use this specification. It also suits fishing and boat clubs hosting shore dinners, and tourism sites where the bank is soft but the view is the reason for the event.

What We Ask Before Building Near Water

Three photographs decide most riverside builds: the access path at its narrowest point, the bank at the planned entrance, and the ground where the crew will stand the frame during assembly. With those in hand we can choose anchoring and packing without a site visit, which shortens the quotation stage considerably for organisers working to a fixed festival date.

Drainage matters more than most organisers expect. Water that pools under a tent reaches the floor and then the guests, so we plan a slight fall away from the entrance and recommend matting at the threshold. Where the site holds water after rain, the raised deck pays for itself in one evening.

Why Croatian Event Buyers Work With Tendars

Every project starts with an engineering question rather than a catalogue page: what wind will this structure see, what ground will it stand on, and how long will it stay up. Our technical team reviews site photographs, exposure and event duration before a configuration is proposed, and the recommendation is issued as a drawing set that a venue manager or a safety officer can actually read.

The factory behind that advice is vertically integrated. Aluminum profiles are cut, machined and welded in house, PVC panels are welded on our own high-frequency lines, and every frame is trial assembled before it is packed. Because we control both the metal and the membrane, a buyer gets one supplier responsible for fit, tension and finish instead of two parties pointing at each other when a panel does not line up.

Documentation is part of the product. Shipments include shop drawings, the packing list matched to crate labels, an installation sequence and a maintenance sheet, and we retain the drawings so that repeat orders match the first delivery exactly. For public events, hotel terraces and protected sites we also prepare the fire performance and anchoring paperwork that local inspections typically request. For riverside summer festivals, the drawing set we issue reflects that specific use rather than a generic template.

Notes for the Croatian Market

Most Croatian event enquiries arrive with three requirements: the structure must look right for a coastal or heritage setting, it must stand up to wind that arrives without warning, and it must be installed inside a tight access window. We address these in the quotation stage rather than after the order, which is why our proposals include anchoring options, installation crew guidance and a delivery sequence suited to ferry timetables and old town access restrictions.

Documentation matters too. Public events, hotel terraces and protected sites increasingly require fire performance evidence and a clear anchoring plan. We prepare those documents with the order so the organiser can answer a venue or an inspection without delay, and we keep the drawings on file for repeat orders so the second season is faster than the first.

Frequently Asked Questions

- **How is wind resistance confirmed for a specific site?** We review photographs of the ground, surrounding buildings and prevailing wind direction, then issue a configuration with written operating limits. Where a site is fully exposed we specify heavier profiles, continuous bracing and anchoring suited to rock or thin soil instead of garden stakes.
- **Which documents come with the shipment?** Shop drawings, a packing list matched to crate labels, an installation sequence, a maintenance sheet and, where required, fabric fire certification and test reports. These are the documents venues and inspections normally ask for, so they travel with the goods rather than arriving later.
- **Can one frame be used for summer and winter events?** Yes. The frame is the durable part, so we supply interchangeable skins: open or mesh walls with a shade roof for summer, solid insulated walls with liners and heating ports for winter. Storage is then limited to the panels not currently in use.

Packaging and Quality Assurance

Every order is packed for two journeys, not one: the delivery to the site and the return to storage at the end of the season. Bundles are strapped to prevent movement, fabric is protected from chafing against aluminum edges, and crates are sized so that a two person crew can handle them without lifting equipment.

Quality checks run through production rather than only at the end. Aluminum is inspected for alloy and wall thickness on arrival, welded panels are water tested, and finished frames are trial assembled. Anything that fails is corrected before packing, so the receiving crew spends its time building rather than sorting. Shipments for riverside summer festivals are labelled accordingly, so the receiving crew can match crates to the drawing on arrival.

Request a Quotation

Send us your site location, expected guest numbers, event dates and ground surface, and we will return a configuration proposal with anchoring options, installation guidance and a delivered price to your Croatian port or site. Samples of fabric and frame profiles can be couriered on request.

Email: amanda@marquees-tent.com | WhatsApp: +86-13640286461 | Web: http://www.marquees-tent.com

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China