



Custom Trade Show Event Party Tent Aluminum Alloy 6061 Frame Heated Party Tent

Our Product Introduction

Basic Information

- Place of Origin: Guangdong
- Brand Name: Tendars
- Certification: ISO9001, SGS Coc, CE
- Model Number: Big tent
- Minimum Order Quantity: 25 square meters
- Price: Reconsideration
- Packaging Details: 1, The aluminium frame structure packed into the bubble film 2, the pvc fabric roof cover and sidewalls are packed into the PVC fabric carry bag; 3, Hardware packed into the box.
- Delivery Time: 18days or To be negotiated
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50000 Square Meters per Month




Product Specification

- Product Name: Top Tent Companies
- Frame: Hard Pressed Aluminum Alloy T6061/T6
- Roof Cover: 850g/sqm PVC Coated Polyester Fabric
- Side Wall: 650g/sqm PVC Coated Polyester Fabric
- Fabric Color Option: White, Transparent Or Customized
- Accessories: PVC Windows, Glass Door, Stake, Stake Puller, Rain Gutter, Lining And Curtain, Flooring System, Glass Walling System, Weight Plate, ABS/Sandwich Wall System
- Wind Load: 100km/h Or Customized
- Application: Weddings, Parties, Factories, Workshops, Exhibitions, Events, Etc
- Highlight: **Aluminum Alloy Event Party Tent, Aluminum 6061 Event Party Tent**



More Images




for more products please visit us on marquees-tent.com

Product Description

Custom Trade Show Event Party Tent Aluminum Alloy 6061 Frame Heated Party Tent

Product Specification:

20 x 20 40 x 60 40x80 Wholesale Big White Wedding Party Marquee Tent				
Main Frame		Hardpressed Aluminum Alloy T6061/T6		
Roof		850g/sqm white PVC Fabric		
Sidewall		650g/sqm white PVC Fabric		
Available Width		from 3m to 60m		
Length		Unlimited		
Sidewall Height		2.7m, 3m, 4m, 8m or customized		
OEM/ODM		Available		
Application		Wedding, Party, Event, Exhibition, etc		
Tent Size(m)	Side Height(m)	Frame Size(mm)	Footprint()	Accommodate Capacity (Events)
5x12	2.6	82x47x2.5	60	40-60 people
6x15	2.6	82x47x2.5	90	80-100 people
10x15	3	82x47x2.5	150	100-150 People
12x25	3	122x68x3	300	250-300 people
15x25	4	166x88x3	375	300-350 People
18x30	4	204x120x4	540	400-500 People
20x35	4	204x120x4	700	500-650 People
30x50	4	250x120x4	1500	1000-1300 People

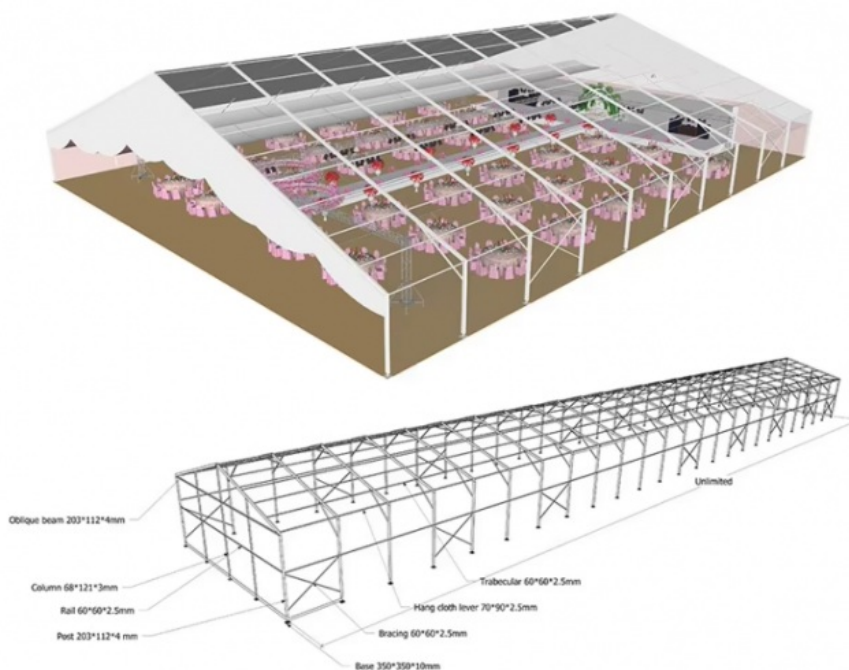

Advantage :

1. Convenient installation and disassembly, free choice of site, can be built in different environments.
2. Aluminum frame, steel parts connection, PVC tarpaulin high frequency welding, fixed base, strong mechanical properties.
3. Pre-sale, sale and after-sales tracking service, the first time to feedback and solve the problem.
4. Can be designed and produced according to demand, elegant appearance, and provide corresponding supporting facilities (hard wall, high partition, top curtain, side curtain, floor, furniture, lighting, air conditioning, portable toilet, European fence)
5. Widely applicable: Commercial exhibition, festival celebrations, catering and entertainment, logistics and warehousing, outdoor leisure, municipal convenience, etc., all kinds of outdoor temporary activities are useful.

Structure :

1. Aluminum box girder frame, the connection between columns is supported by steel components, the roof is reinforced by steel cable, and the roof and wall are protected by substrate. The material selection of aluminum alloy profile GB/T-6061 standard, the national non-ferrous metal quality supervision and inspection center inspection, the material qualified. The materials and structures used in tents have high integrity and safety. The structure complies with strict European standards. The overall structure has been subjected to wind tests and damage tests by professional organizations.

2. Second, the tarpaulin adopts synthetic fiber cloth double-sided PVC coating, which has durable bonding performance; The scraping technology uses the physical and chemical bonding between liquid PVC and fiber to scrape the paste directly onto the fabric; The welded fabric can withstand a lot of tension, even in harsh environments such as hurricanes and frequent operations, it will not affect the degree of sealing of the welding;

A certain thickness not only makes the blade coated fabric have good anti-ultraviolet ability, but also prolongs the service life of the product. Because the pigment is directly immersed in the PVC coating, the color of the razor coated fabric can remain as bright as new. Anti-corrosion, anti-mildew, anti-ultraviolet and flame retardant (M2 and B1) and other properties meet international standards, properly used and stored, three to five years will not rot, mold.

Accessories



ABS Wall



Aluminium Alloy Door



Carpet



Floor



Glass Door



Expansion Screw



lamps and lanterns



Glass Screen Wall



Curtain



PVC Transparent Wall



Rolling Shutter Door



Floor Nail

FAQ :

Any Quality Guarantee in TENDARS?

We have a series of strict quality inspection for our material. The hardness of 6061-T6 aluminum alloy is at least 250 MPa. And the thickness of covered PVC fabric is ≥ 0.67 mm. The fire retardant of the covered membrane is meet to US standard: NFPA 701 and Euro standard: DIN4102 B1, M2.

Can your tents be installed and dismantled easily? What is the life span?

Yes, our tents can be assembled and dismantled quickly. The lifespan of aluminum framework can reach 8-10 years and 4-6 years for PVC covering fabrics, depending on different application conditions



Guangzhou Tendars Tent Co., Limited

☎ 0086 13640286461

✉ amanda@marquees-tent.com

🌐 marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China