Custom Outdoor Panel Roof Hall Paddle Tennis Court Tents For Sport Tent, Tennis Tent

Basic Information

Place of Origin: GuangdongBrand Name: Tendars

• Certification: ISO9001, SGS, Coc, CE

Model Number: Big tent

Minimum Order Quantity: 25 square metersPrice: Reconsideration

• Packaging Details: 1, The aluminium frame structure packed into

the bubble film 2, the pvc fabric roof cover and sidewalls are packed into the PVC fabric carry bag; 3, Hardware packed into the box.

Delivery Time: 18days or To be negotiated

Payment Terms: L/C, T/T, Western Union, MoneyGram
Supply Ability: 50000 Square Meters per Month



Product Specification

Product Name: Outdoor Hall Tent For Sports

Material: Hard Pressed Extruded Aluminium Alloy

6061/T6

• Eave Connection: Hot-dip Galvanized Twin Plate; expansion

Bolts To Fix Tent

Application: Sport Tent, Tennis Tent

Wind Resistance: 80-140 Km/h

• Temperature Resistance: -30 Degree Celsius ~ +70 Degree Celsius

Ground Situation: Grassland,earth Land,asphalt

Ground, cement Ground

Additional Service: Calculations (wind, Snow, And Seismic

Resistance Performance)



More Images





Product Description

Custom Outdoor Panel Roof Hall Paddle Tennis Court Tents For Sport Tent, Tennis Tent


Description:

| Frame | 4 channels, hard pressed extruded aluminium alloy 6061/T6. | | | | |
|----------------------------|---|--|--|--|--|
| l rame | (Surface anodized finish. Anti rust.) | | | | |
| Roof Cover | water proof, 850g/m². Flame retardant.PVC-coated Polyester. | | | | |
| Wind Resistance | 80~140km/h | | | | |
| Snow Load | 25kg/sqm | | | | |
| Fixing Solution | Ground anchor, expandable bolt, weight plate, etc. | | | | |
| Roof Insulation Material | Heat insulation rate >60% | | | | |
| Drainage Waterproof Design | Direct drainage or PVC rigid drainage pipe | | | | |
| Ground Situation | Grassland,earth land,asphalt,cement ground,marble,etc | | | | |
| Connectors | ors Hot-dip galvanized twin plate;expansion bolts to fix tent | | | | |

Details:

- * Cover Material: Flame retardant to DIN4102 B1,M2,650-900g/sq.m
- * Color: White, red, yellow, blue, green, black, transparent etc * Function: Party/Wedding/Banquet/Ceremony, etc.
- * Connections:Hot-dip galvanized steel.

| Туре | Span | Side height | Ridge height | Bay Distance | Roof | Longest Component | Wind Load | |
|-----------------------|------|---|--------------|--------------|-------|-------------------|-----------|--|
| | (m) | (m) | (m) | (m) | Pitch | (m) | (km/h) | |
| 3/2.6-3 | 3 | 2.6 | 3.2 | 3 | 20 | 3.5 | 80 | |
| 4/2.6-3 | 4 | 2.6 | 3.4 | 3 | 20 | 4.1 | 80 | |
| 6/2.6-3 | 6 | 2.6 | 3.7 | 3 | 20 | 3.5 | 80 | |
| 8/2.6-3 | 8 | 2.6 | 4.1 | 3 | 20 | 4.3 | 80 | |
| 9/2.6-3 | 9 | 2.6 | 4.3 | 3 | 20 | 4.8 | 80 | |
| 10/2.6- 3 | 10 | 2.6 | 4.5 | 3 | 20 | 5.3 | 80 | |
| 12/2.6- 3 | 12 | 2.6 | 4.8 | 3 | 20 | 3.2 | 80 | |
| Main frame Profile | | 100x48x3mm (4-channel) | | | | | | |
| Eave Connection | | Hot-dip Galvanized Steel Insert | | | | | | |
| Roof Fixing | | Bar Tension | | | | | | |
| Frame Material | | Hard Pressed Extruded Aluminum 6061/T6 | | | | | | |
| Cover Material | | Double PVC coated Polyester textile, flame retardant to DIN4102 B1,M2,650-900g/sq.m | | | | | | |

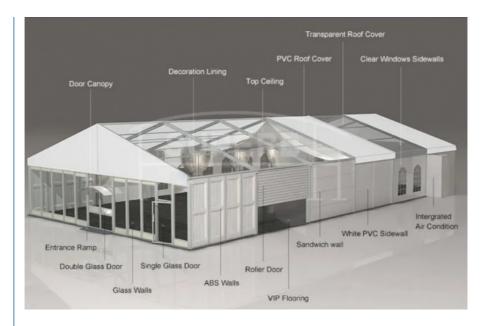

FQA:

Q: What size of width and length for your tent?

A: The width we offer from 3m-60m. Length are unlimited which can increase by multiples of 3m unit or 5m unit.

Q: Is your tent safe enough to do permanent structure?

A: Sure, the main frame are manufactured with high impact extruded anodized aluminum (6061/T6) which can resist wind up to 100 km/h.

Q: What is the life span of your products?

A: Our tents are thoroughly confirm to the strictest European and the Australia quality standards, life span of aluminum alloy is 20-30years, PVC roof and sidewalls is 10 years.

Q: What kinds of tent can you produce?

A: We are the leading tent manufacturer in China and produce different sizes of tents which clear span could be from 3m to 65m in different shapes.

Q: Can you make customized tent?

A: Yes, OEM and ODM orders are available by our experienced engineers.

Q: What is the cover made of?

A: Double coated PVC fabric; UV-resistance; flame retardant to DIN4102 B1, M2;

Q: whether need equipment to install your tent?

A: It depend on size, Small clear span (3m to 15m) tent do not need any equipment; 15-22m clear span need fork car; above 22m clear span tent need crane.

Q: What documents are available?

A: A full range documents including structural drawings, packing list, installation manual and relative certificates can be provided.

Q: What is the production lead-time before loading time?

A: 20-30 days ex-factory against receipt of deposit.

If urgent order, can be finished within one week according to our material stock situation.

can be finished within one week according to our material stock situation.





Guangzhou Tendars Tent Co., Limited







marquees-tent.com

 $No.319, 2nd\ building\ ,\ 8th\ zone\ ,\ Aoyuan\ city\ plaza\ ,\ Zhongcun\ Street,\ Guangzhou,\ Guangdong,\ China$