

Guangdong

ISO9001, SGS, Coc, CE

25 square meters

Reconsideration

Tendars

Big tent

Big Marquee Hall Alu Frame Tarpaulin Cover Tent For Storage Surface Treat Method Etc

1, The aluminium frame structure packed into the bubble film 2, the pvc fabric roof cover and sidewalls are packed into the PVC fabric carry bag; 3, Hardware packed into the box.

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time: 18days or To be negotiated
 Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50000 Square Meters per Month



Product Specification

- Features:
- Product Name:
- Surface Treat Method:
- Tent Roof Fabric: 850
- Sidewall Fabric:
- Warranty:
- Wind Load:
- Application:

- Water Proof, UV Resistance, Fire Retardant(DIN4102,B1,M2) Tarpaulin Cover Tent Hot Dip Galvanized
- : 850g/sqm PVC Coated Polyester Fabric
 - 650g/sqm PVC Coated Polyester Fabric
 - 5 Years
- 100km/h Or Customized
 - Wedding, Party, Event, Ceremony Hall And So On



More Images



Product Description

Big Marquee Hall Alu Frame Tarpaulin Cover Tent For Storage Surface Treat Method Etc

Description :

Frame	Hardpressed Aluminum Alloy T6061/T6
Roof	850g/sqm White PVC Fabric for Roof
Sidewall	650g/sqm White PVC Fabric
Width	5-60m
Length	unlimited
Color	White, Green , Blue, Customized
Feature	Waterproof, Fire Retardant, UV Resistant
Application	Event, Wedding, Party, Ceremony, etc

COMMERCIAL TENT SPECIFICATION			
Main Profile	Material	Hardpressed Extruded Aluminum Alloy 6061-T6	
	Available	84 x 48 x 3mm, 112 x 203 x 4mm, 166 x 88 x 3mm, 120 x 200 x 4mm, 120 x 250 x 4mm, 120 x	
	Size	300 x 5mm, 120 x 350 x 6mm, 120 x 400 x 6mm (depend on the span size)	
	Hardness	At Least 250 MPa	
	Quality		
	Features	Stainless, Lightweight, Durable, 4 Channel	
	of Frame		
	Windload	Up to 120km/h	
Cover	illensity	850g / sqm Block-out white PVC Tarpaulin, 950g / sqm transparent PVC Fabric; 650g/sqm	
		White PVC for Sidewall	
	Thickness	≥0.67mm	
	Features	Best performances in breaking strength, water-proof, UV-proof, flame retardant (DIN4102 B1	
	i ealures	M2 / NFPA701)	
Comp	Superior Enclosure with Hot Dip Galvanized Steel.		
onent			

Main Features of the Tent

1. Flexible Span Size.

Shelter provides full width for sale. [3 to 60m(10 - 200ft)].

2. All Application.

Clear span tent offers the weatherproof venue for any commercial occasion like branding, opening ceremony, exhibition and more.

3. All-weather Protection.

The commercial tent has outstanding performance in windload (up to 100km/h), UV resistance, temperature control.

FAQ:

Q1. What is the MOQ in Tendars?

One Set.

Q2. What is the Payment Term in Tendars?

30% Deposit to be made After signing PI, 70% before shipment.

Q3. What is the Normal Product Time for Standard Design?

15 - 25 days after deposit received.

Q4. Does Tendars Provide Basic Installation Tool?

We provide ropes to connect the PVC sidewall and fork for helping set up the frame.

Q5. Do You Provide Any Guidance on the Job-site?

We will attach the build instructions in your product package. If you need, we will send our technology staff and project manager to provide installation guidance in your job-site for FREE.

Q6. Where can I installed the Tent Structures?


Clear span tent structures can be installed without land permission and foundation unlimited. You can set up the tent on hard land, grassland, or

for more products please visit us on marquees-tent.com

sand land. Also, we will offer different fixation kit for your requirement.

Q7. How Long Will a Shelter Clear Span Structure Last?

In the reasonable using, the lifespan of the aluminum alloy can last over 30 years and the PVC cover is guaranteed up to 5 years. And Shelter will offer you an affordable price for component replacing.

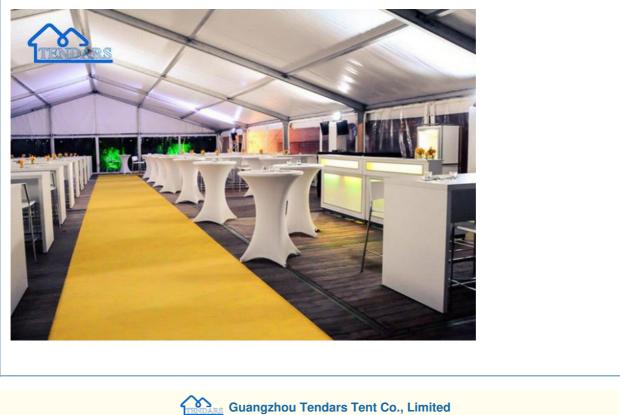

 Instruction
 Instruction

 Image: Control of the contro