


A-Frame Exhibition Trade Show Marquee Tent Column Free Clear Span Display Canopy Structure

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: ISO9001, SGS, COC, CE
- Model Number: TDS-AF15X50
- Minimum Order Quantity: 150 square meters
- Price: USD 40-55 / Square Meter
- Packaging Details: Frame in bundles on timber skids, fabric in bay numbered bags, floor panels stacked with corner protection, electrical kit in one labelled crate
- Delivery Time: 25 days production after deposit and drawing approval. Sea freight time depends on your destination port. Installation time varies with the project and site access.
- Payment Terms: T/T 30% deposit, 70% before loading; L/C at sight above USD 50,000
- Supply Ability: 50000 Square Meters per Month

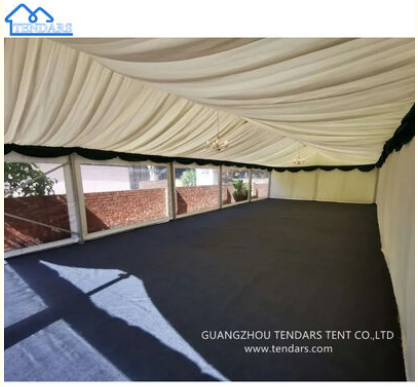

Product Specification

- Span Width: 15m
- Length: 50m (10 Bays Of 5m)
- Eave Height: 3m
- Ridge Height: 5.6m
- Floor Area: 750 Square Meters
- Area Per Guest: 1.2 To 2 Sqm, 375 To 625 Visitors
- Main Frame: 166 X 88 X 3mm Aluminium 6061/T6
- Base Plate: 350 X 350mm Hot Dip Galvanised Steel
- Floor System: 18mm Plywood Cassette On Adjustable Feet, 500 Kg/sqm
- Door Opening: 3m Double Wing At Both Gable Ends
- Wind Load: 0.3 KN/sqm
- Frame Life Span: 20+ Years
- Production Time: 25 Days
- Highlight: **A-Frame Trade Show Marquee Tent**, **Clear Span Exhibition Canopy Structure**

for more products please visit us on marquees-tent.com

Our Product Introduction

for more products please visit us on marquees-tent.com

Product Description

15m x 50m exhibition hall, column free

750 sqm with no internal column, 3m to the eave, and a 3m double door at each end. Built for trade fairs where the exhibitor arrives with a pallet, not a suitcase.

Details

Exhibitors judge a hall on three things: can the forklift reach booth 41 without stopping, does the floor hold a loaded pallet, and can a 4m banner hang without hitting a leg. This structure answers all three.

Area guide: 1.2 to 2 sqm per visitor. 750 sqm takes 375 to 625 visitors, or about 50 booths at 12 sqm each including aisle. The 15m span divides cleanly: two 6m booth rows with a 3m centre aisle, or three 3m rows with two 3m aisles. Send a hand sketch and a CAD plan comes back in 48 hours, free.

Size range and options

Span: 15m. Range 10m to 40m.
Length: 50m as standard, any multiple of 5m.
Eave: 3m. Go to 4m if exhibitors build two storey stands.
Doors: 3m double wing both gables, 2.4m side service door.
Extras: cassette floor, blackout lining, LED track lighting, distribution board, carpet.

Main components

Frame. 166 x 88 x 3mm aluminium 6061/T6, 5m single bolt bays, galvanised steel joints, 350 x 350mm base plates. 20+ years.
Covers. 850gsm PVC roof to DIN 4102 B1, 650gsm walls. Blackout lining is available for conference halls inside the tent.
Floor. 18mm film faced plywood in steel cassettes on adjustable feet with 50mm of travel. 500 kg/sqm uniform, 250 kg point load on 200 x 200mm.

Specification

Item	Specification
Clear span / length	15m / 50m, 10 bays of 5m
Eave / ridge	3.0m / 5.6m
Frame	166 x 88 x 3mm aluminium 6061/T6, 5m single bolt bays
Roof	850gsm PVC, blackout lining optional
Floor	18mm cassette on adjustable feet, 500 kg/sqm
Doors	3m double wing both ends, 2.4m side service door
Frame life	20+ years

Power and permits

Standard electrical kit: 24 way distribution board, 100m of 3 x 2.5mm cable in wall pockets, 40 LED track spots at 30W. Heavy machinery stands usually bring their own generator and use our cable routes.
For public shows we supply the EN 13782 structural report and the DIN 4102 B1 fabric certificate. Exit widths depend on the final occupancy, so we draw the exit layout after the floor plan is fixed.

Production and installation

25 days production after deposit and drawing approval, plus freight to your port. Six workers set 10 bays in three days; a first time crew takes five. *Installation is quoted separately: labour, air tickets, visa, food and accommodation are paid by the buyer. Send us the site address and we confirm crew size, days and cost.*

FAQ

Can a forklift drive inside? Through the 3m gable door, yes. Floor rating 500 kg/sqm covers a 2.5 tonne counterbalance with a loaded pallet.
Will the floor work on grass? Yes, but lay geotextile first. Without it cassettes sink 40mm over a three day show and every counter ends up at an angle.
Can we hang banners from the frame? Up to 40kg per purlin node. Anything heavier needs a rigging plan.

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China