
Insulated Roof Party Marquee Tent Designed for Spring Gala Season Croatia

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: CE, ISO 9001, EN 13782, DIN 4102 B1 fabric
- Model Number: TD-PMT-B3-04
- Minimum Order Quantity: 1 set
- Price: USD 25 - 95 per square meter
- Packaging Details: Frame in bundles by assembly order, fabric folded with interleaving, fittings in labelled crates
- Delivery Time: 15-25 working days after drawing confirmation
- Payment Terms: T/T 30% deposit, balance before shipment; L/C at sight
- Supply Ability: 12000 square meters per month

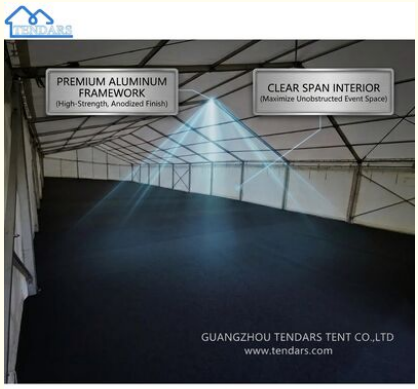

Product Specification


- Frame Material: Hard-pressed Extruded Aluminum 6061/T6
- Frame Profile: 64 / 82 / 100 / 120 Mm Series By Span
- Roof Fabric: 650-850 G/sqm Double PVC-coated Polyester
- Side Wall: PVC, Clear PVC, Glass Panel, Mesh, ABS Hard Wall
- Wind Load: Engineered Configuration With Written Operating Limits
- Snow Load: Steeper Pitch And Reduced Purlin Spacing Options
- Fire Retardant: DIN 4102 B1 / EN 13501 B-s1,d0 On Request
- Application: Spring Gala Season
- Warranty: 5 Years Frame, 2 Years Fabric
- Service: Shop Drawings, Supervisor Installation, Lifetime Spares
- Highlight: **Insulated Roof Party Marquee Tent**,



More Images



for more products please visit us on marquees-tent.com



Our Product Introduction

for more products please visit us on marquees-tent.com

Product Description

Spring galas sit in an awkward climate window. Days are warm enough to hold the event outside, nights are cold enough that guests in evening dress feel it by ten o'clock, and heating a single skin tent means running equipment hard and still feeling cold near the walls. An insulated roof changes that balance by keeping warm air where it was paid for.

Roof insulation delivers most of the benefit because heat rises. A suspended roof liner traps a still air layer, reduces condensation on the underside of the fabric, and lowers the radiant cold that guests feel from above. Wall liners then complete the envelope, and entrance management stops the gains leaking out every time a guest arrives.

Key Features and Selling Points

- **Suspended roof liner:** A still air gap under the roof cuts heat loss and removes radiant cold above guests.
- **Condensation control:** Liner and ventilation strategy keep the underside dry, so nothing drips onto tables.
- **Wall liner option:** Completing the envelope reduces draughts and improves comfort near the perimeter.
- **Heater sizing guidance:** Equipment sized for the lined volume rather than for an unlined tent of the same area.
- **Entrance management:** Lobby or air curtain detail to stop warm air leaving with each arrival.
- **Removable in summer:** Liners come out for warm season events, so one structure covers both calendars.

Technical Specifications

Parameter	Specification
Roof	Suspended insulated liner
Walls	Optional wall liners
Heating	Sized for lined volume
Entrance	Lobby or air curtain option
Frame material	Hard-pressed extruded aluminum alloy 6061/T6, anodized finish
Frame profile series	64 mm / 82 mm / 100 mm / 120 mm square profiles by span
Bay spacing	3 m / 4 m / 5 m modular bays, extendable at any time
Eave height options	2.5 m to 4 m clear height, higher on request
Roof fabric	650 g / 750 g / 850 g per sqm double PVC-coated polyester, blackout available
Side wall options	Solid PVC, clear PVC, glass panel, mesh, glass door, ABS hard wall
Fire performance	Fabric meeting DIN 4102 B1 / EN 13501 B-s1,d0 on request
Wind load guidance	Engineered configuration by site exposure, documented operating limits
Snow load guidance	Steeper pitch and reduced purlin spacing for snow regions
Temperature range	-30 C to +70 C service range for fabric and frame
Design life	15 years frame, 8 to 10 years fabric under normal use
Warranty	5 years on aluminum frame structure, 2 years on PVC fabric

All values are configuration dependent. Final specifications are confirmed on the approved drawing before production.

Clear Span, Transparent Roof or Solid Wall

The three common configurations are compared below. Most Croatian projects combine two of them on one frame, for example glass facing the sea and insulated solid walls facing the windward side.

Configuration	Exposure grade	Main advantage	Photography	Best suited to
Clear span with solid PVC walls	A	Full weather protection, lowest cost per sqm	Clean but featureless	Dinners, winter functions, storage
Clear span with clear or glass walls	A+	Protection with uninterrupted view	Excellent, low reflection	Seaside receptions, terraces, marina bars
Transparent roof with solid walls	A+	Sky visible, walls shelter wind	Strong at dusk, hot at midday	Evening ceremonies, sunset dinners
Open sided with shade roof	B	Maximum airflow, no rain protection	Bright and airy	Beach clubs, day bars, summer lounges

Buy or Hire: A Decision Table

Route	Typical user	Trade off
Buy	Recurring events, seasonal terraces, rental fleets	Own asset, no repeat fees, custom branding
Hire locally	One off events with no storage or crew	Low upfront cost, limited configuration choice
Buy with seasonal resale	Growing event businesses	Asset value retained, aluminum recyclable

Configuration Guide for Croatian Buyers

Use the table below to match the structure to your site exposure and event type. Our engineers confirm the final configuration against photographs of the ground, the prevailing wind direction and the event duration.

Duty level	Typical use	Recommended build
Light duty	Garden parties, short events, sheltered inland sites	64 mm profile, alternate bay bracing
Standard duty	Weddings, corporate functions, coastal towns in summer	82 mm profile, cross-braced bays, mixed walls
Heavy duty	Exposed coast, island venues, public events, winter use	100-120 mm profile, full bracing, engineered anchors

Applications

Spring gala dinners, charity evenings, award ceremonies and hotel anniversary events use insulated roof structures in April and May, when the evening temperature drops quickly. It also suits autumn events in September and October, when the same conditions return with more rain.

Comfort Planning for a Cool Evening

Two numbers guide the specification: the temperature difference between the event hour and the middle of the night, and the number of times doors will open. A gala with a single arrival window needs far less heating capacity than a dinner where guests move in and out all evening, and the liner matters more in the second case because it recovers temperature faster after a door opens.

We recommend a simple test the evening before: heat the tent to target with doors closed, then open the main entrance for two minutes and watch how quickly the room recovers. If recovery is slow, the fix is usually an entrance lobby rather than a bigger heater, and it costs much less.

Why Croatian Event Buyers Work With Tendars

Every project starts with an engineering question rather than a catalogue page: what wind will this structure see, what ground will it stand on, and how long will it stay up. Our technical team reviews site photographs, exposure and event duration before a configuration is proposed, and the recommendation is issued as a drawing set that a venue manager or a safety officer can actually read.

The factory behind that advice is vertically integrated. Aluminum profiles are cut, machined and welded in house, PVC panels are welded on our own high-frequency lines, and every frame is trial assembled before it is packed. Because we control both the metal and the membrane, a buyer gets one supplier responsible for fit, tension and finish instead of two parties pointing at each other when a panel does not line up.

Documentation is part of the product. Shipments include shop drawings, the packing list matched to crate labels, an installation sequence and a maintenance sheet, and we retain the drawings so that repeat orders match the first delivery exactly. For public events, hotel terraces and protected sites we also prepare the fire performance and anchoring paperwork that local inspections typically request. For spring gala season, the drawing set we issue reflects that specific use rather than a generic template.

Notes for the Croatian Market

Most Croatian event enquiries arrive with three requirements: the structure must look right for a coastal or heritage setting, it must stand up to

wind that arrives without warning, and it must be installed inside a tight access window. We address these in the quotation stage rather than after the order, which is why our proposals include anchoring options, installation crew guidance and a delivery sequence suited to ferry timetables and old town access restrictions.

Documentation matters too. Public events, hotel terraces and protected sites increasingly require fire performance evidence and a clear anchoring plan. We prepare those documents with the order so the organiser can answer a venue or an inspection without delay, and we keep the drawings on file for repeat orders so the second season is faster than the first.

Frequently Asked Questions

- **Can the structure be customized to our venue?** Yes. Bay length, span, eave height, wall type and door positions are all selected per project, and we review the site plan before production so the structure arrives ready for the actual ground conditions rather than for an average assumption.
- **What is the minimum order and lead time?** One set is enough to start, and mixed container loading is possible for buyers who want several configurations at once. Standard production runs in about 15 to 25 working days after drawing confirmation, with shipping to Croatian ports arranged by our forwarder or yours.
- **Do you support installation and after-sales service?** We supply drawings, labelled bundles and a step-by-step build sequence, and we can send a supervisor for first installation on larger projects. Spare panels, fittings and profile sections remain available for the life of the structure, so a damaged part never ends the product's service.

Packaging and Quality Assurance

Every order is packed for two journeys, not one: the delivery to the site and the return to storage at the end of the season. Bundles are strapped to prevent movement, fabric is protected from chafing against aluminum edges, and crates are sized so that a two person crew can handle them without lifting equipment.

Quality checks run through production rather than only at the end. Aluminum is inspected for alloy and wall thickness on arrival, welded panels are water tested, and finished frames are trial assembled. Anything that fails is corrected before packing, so the receiving crew spends its time building rather than sorting. Shipments for spring gala season are labelled accordingly, so the receiving crew can match crates to the drawing on arrival.

Request a Quotation

Send us your site location, expected guest numbers, event dates and ground surface, and we will return a configuration proposal with anchoring options, installation guidance and a delivered price to your Croatian port or site. Samples of fabric and frame profiles can be couriered on request.

Email: amanda@marquees-tent.com | WhatsApp: +86-13640286461 | Web: http://www.marquees-tent.com

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China