
Quick Setup Aluminum Party Marquee Tent for Zagreb Corporate Functions

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: CE, ISO 9001, EN 13782, DIN 4102 B1 fabric
- Model Number: TD-PMT-07
- Minimum Order Quantity: 1 set
- Price: USD 25 - 95 per square meter
- Packaging Details: Frame in bundles by assembly order, fabric folded with interleaving, fittings in labelled crates
- Delivery Time: 15-25 working days after drawing confirmation
- Payment Terms: T/T 30% deposit, balance before shipment; L/C at sight
- Supply Ability: 12000 square meters per month

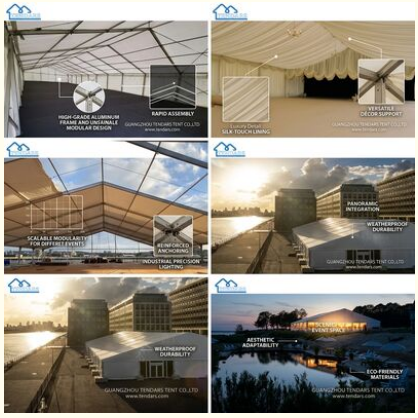


Product Specification

- Frame Material: Hard-pressed Extruded Aluminum 6061/T6
- Frame Profile: 64 / 82 / 100 / 120 Mm Series By Span
- Roof Fabric: 650-850 G/sqm Double PVC-coated Polyester
- Side Wall: PVC, Clear PVC, Glass Panel, Mesh, ABS Hard Wall
- Wind Load: Engineered Configuration With Written Operating Limits
- Snow Load: Steeper Pitch And Reduced Purlin Spacing Options
- Fire Retardant: DIN 4102 B1 / EN 13501 B-s1,d0 On Request
- Application: Zagreb Corporate Functions
- Warranty: 5 Years Frame, 2 Years Fabric
- Service: Shop Drawings, Supervisor Installation, Lifetime Spares
- Highlight: **Aluminum Party Marquee Tent**,



More Images

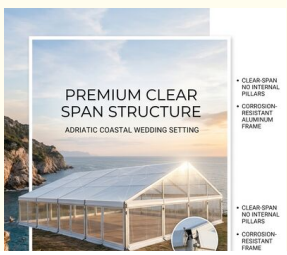

for more products please visit us on marquees-tent.com



Our Product Introduction

for more products please visit us on marquees-tent.com

Product Description

Corporate events are scheduled by marketing calendars, not by construction programmes. A product launch may be confirmed six weeks out, and the venue may only release the courtyard twenty-four hours before the doors open. In that window, installation speed is the specification that matters most. This tent is designed so that a trained crew can build a complete function space in one working day and strike it in less.

Speed comes from three decisions: colour-coded components so no one hunts for the right beam, pre-assembled purlin frames that click into position, and a roof that is pulled over the frame in a single sheet rather than assembled panel by panel. None of this reduces strength, because the connections that save time are the same mechanically clamped joints used on our heavy duty range.

Key Features and Selling Points

- **Colour-coded components:** Every profile and fitting is marked by position so crews assemble without drawings after the first build.
- **Pre-assembled purlins:** Roof purlins arrive as folding frames that open into position and lock, cutting roof assembly time substantially.
- **Single sheet roof pull:** The roof is tensioned over the frame in one operation, avoiding panel-by-panel alignment on site.
- **Tool-light connections:** Clamp and pin fixings reduce the number of bolts per joint, so fewer tools and less ladder time are needed.
- **Reusable branding panels:** Printed gable and wall panels attach with the same quick fixings, allowing brand changes between events.
- **Clear strike sequence:** Labelled crates and a numbered packing plan make dismantling and reloading as fast as installation.

Technical Specifications

Parameter	Specification
Assembly	Colour coded, pre-assembled purlin frames
Typical build	One working day for a full function space
Fixings	Clamp and pin connections, minimal bolting
Packing	Numbered crates with strike sequence
Frame material	Hard-pressed extruded aluminum alloy 6061/T6, anodized finish
Frame profile series	64 mm / 82 mm / 100 mm / 120 mm square profiles by span
Bay spacing	3 m / 4 m / 5 m modular bays, extendable at any time
Eave height options	2.5 m to 4 m clear height, higher on request
Roof fabric	650 g / 750 g / 850 g per sqm double PVC-coated polyester, blackout available
Side wall options	Solid PVC, clear PVC, glass panel, mesh, glass door, ABS hard wall
Fire performance	Fabric meeting DIN 4102 B1 / EN 13501 B-s1,d0 on request
Wind load guidance	Engineered configuration by site exposure, documented operating limits
Snow load guidance	Steeper pitch and reduced purlin spacing for snow regions
Temperature range	-30 C to +70 C service range for fabric and frame
Design life	15 years frame, 8 to 10 years fabric under normal use
Warranty	5 years on aluminum frame structure, 2 years on PVC fabric

All values are configuration dependent. Final specifications are confirmed on the approved drawing before production.

Configuration Guide for Croatian Buyers

Use the table below to match the structure to your site exposure and event type. Our engineers confirm the final configuration against photographs of the ground, the prevailing wind direction and the event duration.

Duty level	Typical use	Recommended build
Light duty	Garden parties, short events, sheltered inland sites	64 mm profile, alternate bay bracing
Standard duty	Weddings, corporate functions, coastal towns in summer	82 mm profile, cross-braced bays, mixed walls
Heavy duty	Exposed coast, island venues, public events, winter use	100-120 mm profile, full bracing, engineered anchors

Applications

Corporate users specify this tent for product launches, dealer conferences, annual meetings, staff celebrations and trade stand overflow in Zagreb and across continental Croatia. Agencies value it because the same inventory can be reused for a client's summer party and winter conference. Venues with tight access windows, such as hotel courtyards and museum grounds, choose it specifically because the build does not block surrounding businesses for days.

Working Inside a Twenty Four Hour Access Window

When access is limited to a single day, preparation decides the outcome. We ask for a site plan, gate width, surface type and the position of any overhead cables before the crew is booked, then sequence the delivery so the roof closes the structure before the most weather-exposed work begins. If the forecast is uncertain, the frame and roof go up first and the walls follow, which keeps the interior usable even if the crew has to pause.

We also recommend a short dry run for in-house teams who intend to install the tent themselves. Two hours of practice on a level surface turns into several hours saved on site, and it dramatically reduces the risk of damaging panels during a rushed build. For recurring corporate clients, we keep the assembly sequence on file so a new crew can pick it up quickly.

Why Croatian Event Buyers Work With Tendars

We have manufactured aluminum marquee structures for more than 17 years, supplying event rental companies, hotels, wedding planners and municipal event teams in over 60 countries, with a growing number of projects along the Croatian coast and inland. Our factory runs in-house aluminum cutting, CNC machining, welding and PVC welding lines, which means the frame and the fabric are made to match each other rather than assembled from third-party parts.

Practical experience shapes the specification. Croatian coastal clients deal with salt air, the bora and short installation windows, while inland clients deal with snow, frost and heated interiors. Having delivered structures into both conditions, we can tell a buyer which details matter for their site instead of selling the same tent to everyone. Every order is supported by shop drawings, a labelled packing list, a written installation sequence and a documented operating limit for wind and snow.

Quality control is documented rather than promised: incoming aluminum is checked for alloy and wall thickness, welded panels are water tested, and finished frames are trial assembled before packing. Structures are produced to CE marking requirements and can be supplied with fabric certification to DIN 4102 B1 or EN 13501 B-s1,d0, together with test reports for buyers who need them for permits or public tenders.

Notes for the Croatian Market

The Adriatic market rewards structures that can change with the season: open and shaded in July, closed and heated in December, and quick to reconfigure when a venue changes its terrace layout. Our Croatian clients increasingly order one frame with two skins rather than two separate tents, which reduces storage, transport and depreciation at the same time.

Ordering from China is a logistics exercise as much as a purchasing decision. We quote delivered terms to Rijeka, Split, Ploce and Kopar, provide packing lists that match crate labels for customs inspection, and sequence loading so that the frame and roof required to close the structure always travel in the first container. Buyers who need documentation for EU import receive the commercial invoice, packing list and certification pack prepared before shipment. For Zagreb corporate functions, that translates into a specification we confirm on the drawing, a delivered price to the Croatian port and a build sequence the local crew can follow without supervision.

Frequently Asked Questions

- **What ground surfaces can the tent be installed on?** Grass and soil take ground stakes, paved terraces take chemical anchors where drilling is permitted, and historic or protected paving takes ballast frames. We confirm the fixing method from photographs before the order, so the crew arrives with the right hardware.
- **How is the fabric maintained during the season?** Panels are cleaned with water and a mild detergent, checked for abrasion at contact points, and stored dry and loosely folded between events. A small repair kit with offcuts and a heat gun resolves most minor damage on site within minutes.
- **Do you supply spares for structures bought years ago?** Yes. Bay dimensions and profile colours are held constant across the range, so panels and fittings from earlier production batches remain compatible. We keep drawings on file to confirm the exact specification before shipping spares.

Packaging and Quality Assurance

Frames are packed in bundles by assembly order, fabric panels are folded with protective interleaving, and small fittings travel in labelled crates that match the packing list. Loading is planned for mixed containers so that several configurations can ship together without wasting volume.

Each shipment includes shop drawings, a packing list, an installation sequence and a maintenance sheet covering cleaning, storage and small repairs.

Before dispatch we trial assemble the frame, check every welded panel for leaks, and photograph the packed goods. If anything arrives damaged in transit, replacement parts are shipped from stock rather than waiting for a new production run.

Request a Quotation

Send us your site location, expected guest numbers, event dates and ground surface, and we will return a configuration proposal with anchoring options, installation guidance and a delivered price to your Croatian port or site. Samples of fabric and frame profiles can be couriered on request.

Email: amanda@marquees-tent.com | WhatsApp: +86-13640286461 | Web: http://www.marquees-tent.com

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China