


Pleated Lining Aluminum Party Marquee Tent Styled for Istrian Villa Weddings

Our Product Introduction


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Tendars
- Certification: CE, ISO 9001, EN 13782, DIN 4102 B1 fabric
- Model Number: TD-PMT-B2-15
- Minimum Order Quantity: 1 set
- Price: USD 25 - 95 per square meter
- Packaging Details: Frame in bundles by assembly order, fabric folded with interleaving, fittings in labelled crates
- Delivery Time: 15-25 working days after drawing confirmation
- Payment Terms: T/T 30% deposit, balance before shipment; L/C at sight
- Supply Ability: 12000 square meters per month

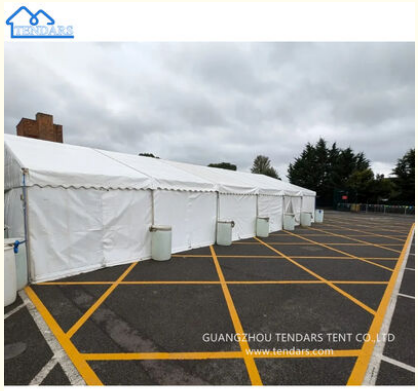

Product Specification

- Frame Material: Hard-pressed Extruded Aluminum 6061/T6
- Frame Profile: 64 / 82 / 100 / 120 Mm Series By Span
- Roof Fabric: 650-850 G/sqm Double PVC-coated Polyester
- Side Wall: PVC, Clear PVC, Glass Panel, Mesh, ABS Hard Wall
- Wind Load: Engineered Configuration With Written Operating Limits
- Snow Load: Steeper Pitch And Reduced Purlin Spacing Options
- Fire Retardant: DIN 4102 B1 / EN 13501 B-s1,d0 On Request
- Application: Istrian Villa Weddings
- Warranty: 5 Years Frame, 2 Years Fabric
- Service: Shop Drawings, Supervisor Installation, Lifetime Spares
- Highlight: **Pleated Lining Aluminum Marquee Tent**,

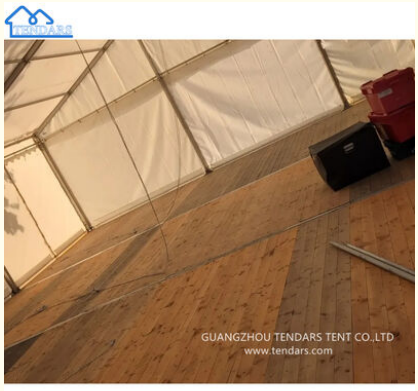

More Images



for more products please visit us on marquees-tent.com



Our Product Introduction

for more products please visit us on marquees-tent.com

Product Description

Istrian villas sell a specific atmosphere: stone, cypress, long tables and late light. A marquee in that setting has to disappear into the aesthetic rather than announce itself. Pleated lining is the fastest route to that result, because it removes the industrial vocabulary of beams and clamps and replaces it with soft vertical rhythm that photographs beautifully in low evening light.

Pleat quality is visible in photographs long after the event. Spacing must be even, the lining must hang straight through the full height of the wall, and the junction between wall and roof must be closed rather than showing a gap. We set pleat spacing to the bay grid, so the room reads symmetrically from every angle and the lining does not drift out of alignment around the perimeter.

Key Features and Selling Points

- **Even pleat spacing:** Pleats are set to the bay grid so the rhythm stays consistent around the full perimeter.
- **Full height hang:** Lining runs from roof junction to floor without a horizontal break or visible seam line.
- **Closed wall and roof junction:** A continuous detail removes the gap where frames usually become visible.
- **Ivory or warm white tones:** Fabric tones selected to work with stone, timber and candlelight in photographs.
- **Coordinated entrance drape:** Entrance curtains and stage skirts made to match the main lining for a consistent finish.
- **Lining compatible lighting:** Uplighters and pin spots positioned with the lining layout to avoid hot spots on fabric.

Technical Specifications

Parameter	Specification
Lining	Pleated wall and roof lining
Tone	Ivory, warm white or custom
Junction	Closed wall to roof detail
Detail	Matching entrance drape and stage skirt
Frame material	Hard-pressed extruded aluminum alloy 6061/T6, anodized finish
Frame profile series	64 mm / 82 mm / 100 mm / 120 mm square profiles by span
Bay spacing	3 m / 4 m / 5 m modular bays, extendable at any time
Eave height options	2.5 m to 4 m clear height, higher on request
Roof fabric	650 g / 750 g / 850 g per sqm double PVC-coated polyester, blackout available
Side wall options	Solid PVC, clear PVC, glass panel, mesh, glass door, ABS hard wall
Fire performance	Fabric meeting DIN 4102 B1 / EN 13501 B-s1,d0 on request
Wind load guidance	Engineered configuration by site exposure, documented operating limits
Snow load guidance	Steeper pitch and reduced purlin spacing for snow regions
Temperature range	-30 C to +70 C service range for fabric and frame
Design life	15 years frame, 8 to 10 years fabric under normal use
Warranty	5 years on aluminum frame structure, 2 years on PVC fabric

All values are configuration dependent. Final specifications are confirmed on the approved drawing before production.

Clear Span, Transparent Roof or Solid Wall

The three common configurations are compared below. Most Croatian projects combine two of them on one frame, for example glass facing the sea and insulated solid walls facing the windward side.

Configuration	Exposure grade	Main advantage	Photography	Best suited to
Clear span with solid PVC walls	A	Full weather protection, lowest cost per sqm	Clean but featureless	Dinners, winter functions, storage
Clear span with clear or glass walls	A+	Protection with uninterrupted view	Excellent, low reflection	Seaside receptions, terraces, marina bars
Transparent roof with solid walls	A+	Sky visible, walls shelter wind	Strong at dusk, hot at midday	Evening ceremonies, sunset dinners
Open sided with shade roof	B	Maximum airflow, no rain protection	Bright and airy	Beach clubs, day bars, summer lounges

Buy or Hire: A Decision Table

Route	Typical user	Trade off
Buy	Recurring events, seasonal terraces, rental fleets	Own asset, no repeat fees, custom branding
Hire locally	One off events with no storage or crew	Low upfront cost, limited configuration choice
Buy with seasonal resale	Growing event businesses	Asset value retained, aluminum recyclable

Configuration Guide for Croatian Buyers

Use the table below to match the structure to your site exposure and event type. Our engineers confirm the final configuration against photographs of the ground, the prevailing wind direction and the event duration.

Duty level	Typical use	Recommended build
Light duty	Garden parties, short events, sheltered inland sites	64 mm profile, alternate bay bracing
Standard duty	Weddings, corporate functions, coastal towns in summer	82 mm profile, cross-braced bays, mixed walls
Heavy duty	Exposed coast, island venues, public events, winter use	100-120 mm profile, full bracing, engineered anchors

Applications

Villa weddings, anniversary dinners, engagement parties and intimate destination celebrations in Istria, Hvar and the Pelješac peninsula use pleated lining to soften a structure into the landscape. It also suits boutique hotel garden dinners where a bare frame would look out of place against stone architecture.

Styling Decisions That Show Up in Photos

Pleat width changes the character of a room. Narrow pleats read as formal and hotel-like, wider pleats feel softer and more rural, and the choice should follow the venue rather than the catalogue. We bring samples to the site visit where possible, because the same ivory fabric looks different against stone, against cypress and under evening uplighting.

Lighting placement is the second decision that shows up in every photograph. Uplighters set too close to pleated fabric create bright bands and dark gaps, while a slightly greater offset produces the soft gradient most clients expect. We mark the positions on the lining drawing rather than leaving it to be decided on the night.

Why Croatian Event Buyers Work With Tendars

We have manufactured aluminum marquee structures for more than 17 years, supplying event rental companies, hotels, wedding planners and municipal event teams in over 60 countries, with a growing number of projects along the Croatian coast and inland. Our factory runs in-house aluminum cutting, CNC machining, welding and PVC welding lines, which means the frame and the fabric are made to match each other rather than assembled from third-party parts.

Practical experience shapes the specification. Croatian coastal clients deal with salt air, the bora and short installation windows, while inland clients deal with snow, frost and heated interiors. Having delivered structures into both conditions, we can tell a buyer which details matter for their site instead of selling the same tent to everyone. Every order is supported by shop drawings, a labelled packing list, a written installation sequence and a documented operating limit for wind and snow.

Quality control is documented rather than promised: incoming aluminum is checked for alloy and wall thickness, welded panels are water tested, and finished frames are trial assembled before packing. Structures are produced to CE marking requirements and can be supplied with fabric certification to DIN 4102 B1 or EN 13501 B-s1,d0, together with test reports for buyers who need them for permits or public tenders. For Istrian

villa weddings, the drawing set we issue reflects that specific use rather than a generic template.

Notes for the Croatian Market

The Adriatic market rewards structures that can change with the season: open and shaded in July, closed and heated in December, and quick to reconfigure when a venue changes its terrace layout. Our Croatian clients increasingly order one frame with two skins rather than two separate tents, which reduces storage, transport and depreciation at the same time.

Ordering from China is a logistics exercise as much as a purchasing decision. We quote delivered terms to Rijeka, Split, Ploce and Kopar, provide packing lists that match crate labels for customs inspection, and sequence loading so that the frame and roof required to close the structure always travel in the first container. Buyers who need documentation for EU import receive the commercial invoice, packing list and certification pack prepared before shipment.

Frequently Asked Questions

- **What lead time should we plan for a summer event?** Allow 15 to 25 working days for production after drawings are approved, plus shipping time to the port. For spring installations we recommend confirming drawings in winter, because factory slots fill quickly once the European event season begins.
- **Is installation included in the price?** The quotation states clearly what is included. For larger or exposed sites we can send a supervisor for the first installation, and we always provide the drawing set, the labelled packing list and the build sequence so a local crew can complete the work.
- **How do you handle damage discovered after delivery?** Send photographs of the part and its label, and our team confirms within one working day whether it can be repaired locally or replaced from stock. Because every panel and fitting is individually orderable, a single damaged piece never removes a whole structure from service.

Packaging and Quality Assurance

Packing follows the build sequence rather than the shape of the components: the frame and roof bundle that closes the structure against weather is loaded last so it can be unloaded first. Fabric panels travel folded with interleaving to prevent abrasion in transit, and fittings are boxed by assembly stage so nothing has to be sorted on site.

Each crate is weighed, labelled and photographed before loading, and the photographs are sent with the shipping documents. That record settles most transit questions quickly and tells the receiving crew exactly what should be on the pallet before they sign for it. Shipments for Istrian villa weddings are labelled accordingly, so the receiving crew can match crates to the drawing on arrival.

Request a Quotation

Send us your site location, expected guest numbers, event dates and ground surface, and we will return a configuration proposal with anchoring options, installation guidance and a delivered price to your Croatian port or site. Samples of fabric and frame profiles can be couriered on request.

Email: amanda@marquees-tent.com | WhatsApp: +86-13640286461 | Web: http://www.marquees-tent.com

Guangzhou Tendars Tent Co., Limited

0086 13640286461 amanda@marquees-tent.com marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China