



## Fire Retardant Arcum Tents Event Marquee Tent With Glass ABS Panel Solid Wall Festival Dome Tent

### Our Product Introduction


#### Basic Information

- Place of Origin: Guangdong , China
- Brand Name: Tendars
- Certification: ISO9001, SGS, Coc, CE
- Model Number: Big tent
- Minimum Order Quantity: 25 square meters
- Price: Reconsideration
- Packaging Details: 1, The aluminium frame structure packed into the bubble film 2, the pvc fabric roof cover and sidewalls are packed into the PVC fabric carry bag; 3, Hardware packed into the box.
- Delivery Time: 18days or To be negotiated
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50000 Square Meters per Month



#### Product Specification

- Features: Water Proof, UV Resistance, Fire Retardant(DIN4102,B1,M2)
- Product Name: Arcum Event Marquee Canopy Tent
- Frame Material: High Strength Aluminium Alloy Profile
- Roof Cover: PVC Coated Polyester Fabric
- Surface Treat Method: Hot Dip Galvanized
- Sidewall: Soft PVC Fabric, ABS Wall Or Glass Wall
- Season: Four-season Tent
- Application: Wedding, Party, Event, Ceremony Hall And So On
- Highlight: **Fire Retardant Arcum Tents, Event Arcum Tents , Glass Event Marquee Tent**

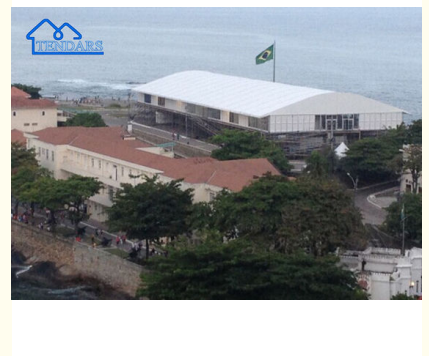

#### More Images



## Product Description

### Fire Retardant Arcum Tents Event Marquee Tent With Glass ABS Panel Solid Wall Festival Dome Tent

#### Product Parameter :

Main Profile	Material: Hard pressed extruded aluminium 6061/T6 Features: Stainless
Cover	Material: Double PVC-coated polyester textile, 750g-900g/m <sup>2</sup> Features: Waterproof, flame retardant to DIN4102 B1, M2, CFM, UV resistant
Eave Connection	Hot-dip Galvanized twin steel plate
Wind Loading	100km/hour

Clear Span Tent					
Items	Span	Eave high	Bay Distance	Main Profile(mm)	Max Wind Load
1	6m	2.8m	3m	48*84*2.7mm	120km/h
2	7m	2.8m	3m	48*84*2.7mm	
3	8m	2.8m	3m	48*84*2.7mm	
4	9m	2.8m	3m	48*84*2.7mm	
5	10m	2.8m	3m	48*84*2.7mm	
6	10m	4.0m	5m	120*150*3.0mm	
7	12m	4.0m	5m	120*150*3.0mm	
8	15m	4.0m	5m	120*150*3.0mm	
9	18m	4.0m	5m	112*203*4.5mm	
10	20m	4.0m	5m	112*203*4.5mm	
11	21m	4.0m	5m	112*203*4.5mm	
12	25m	4,5,6m	5m	112*203*4.5mm	
13	30m	4-6m	5m	120*250*4.0mm	
14	40m	5.4,6.4m	5m	120*300*5.0mm	
15	50m	5.4,6.4m	5m	120*350*5.0mm	
16	60m	5m,6m	5m	120(7mm)*400(6mm)	
17	70m	5m,6m	5m	120(13.6mm)*430(10mm)	
Customized size is available					

#### Installation Steps:

##### Site Selection:

Choose a suitable location for your arcum tent. Ensure the ground is level and free from any sharp objects that could damage the tent fabric or the tent's base.

##### Layout and Positioning:

Lay out the tent fabric and position it in the desired location, making sure it's stretched out flat and free from wrinkles.

##### Frame Assembly:

Assemble the tent frame according to the manufacturer's instructions. This usually involves connecting frame segments, attaching connectors, and securing them with bolts or pins.

##### Erect Center Poles:

Many arcum tents have center poles that support the roof structure. Erect these center poles and ensure they are securely in place. This may require additional equipment like ladders or scaffolding for larger tents.

##### Attach Fabric to Frame:

Starting from one end, attach the tent fabric to the frame by securing it to the frame structure. Follow the instructions provided by the manufacturer for attaching the fabric properly. This often involves using hooks, straps, or clips.

##### Secure Corners and Sides:

Secure the corners and sides of the tent fabric to the ground using stakes or anchors. Ensure that the fabric is taut and properly tensioned.

##### Side Walls and Accessories:

If your arcum tent includes side walls, install them according to the manufacturer's instructions. Additionally, add any accessories such as doors, windows, and flooring as needed.

##### Guy Lines:

Attach guy lines to the tent's frame or anchors. These lines help stabilize the tent and provide extra support in windy conditions. Stake the guy lines into the ground at an angle away from the tent.

##### Inspect and Adjust:

Once the tent is fully installed, inspect it for any wrinkles, slack areas, or potential issues. Make any necessary adjustments to ensure the tent is set up correctly.

##### Secure the Tent:

Ensure that all stakes, anchors, and guy lines are properly secured. Check the tension of the fabric and make any final adjustments to ensure stability.

##### Interior Setup:

Set up the interior of the tent with furniture, lighting, and any other necessary equipment or decorations.

##### Safety Considerations:

Always follow safety guidelines during the installation process, especially if working with larger tents and equipment at height. Use appropriate safety gear and precautions.

Maintenance:

Regularly inspect and maintain your arcum tent to ensure it remains in good condition and safe to use.

#### Optional facilities:

Transparent PVC window  
Luxury carpet  
Cable system  
Glass curtain wall system  
Glass door  
Top and mantle  
Floor system  
Rain gutters  
Sandwich wall or color steel tile wall  
Expansion screw  
Steel bar  
Heavy fixation  
Roll-up door  
Lighting system  
Insulation wall and insulation canopy

#### Common fixing methods:

1. Expansion screws: suitable for the ground is cement or asphalt and other hardened ground and can be destroyed;
2. Ground nail/steel: suitable for the ground is soft soil, soft sand, mud or grassland;
3. Load-bearing plate: suitable for marble, tile and other undamaged ground, can be loaded with cement, sand and so on;
4. Embedded parts: long-term fixed on the cement floor can be used embedded facilities, bolted or welded fixed.



Guangzhou Tendars Tent Co., Limited



0086 13640286461



amanda@marquees-tent.com



marquees-tent.com

No.319, 2nd building , 8th zone , Aoyuan city plaza , Zhongcun Street, Guangzhou, Guangdong, China